


Oct.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

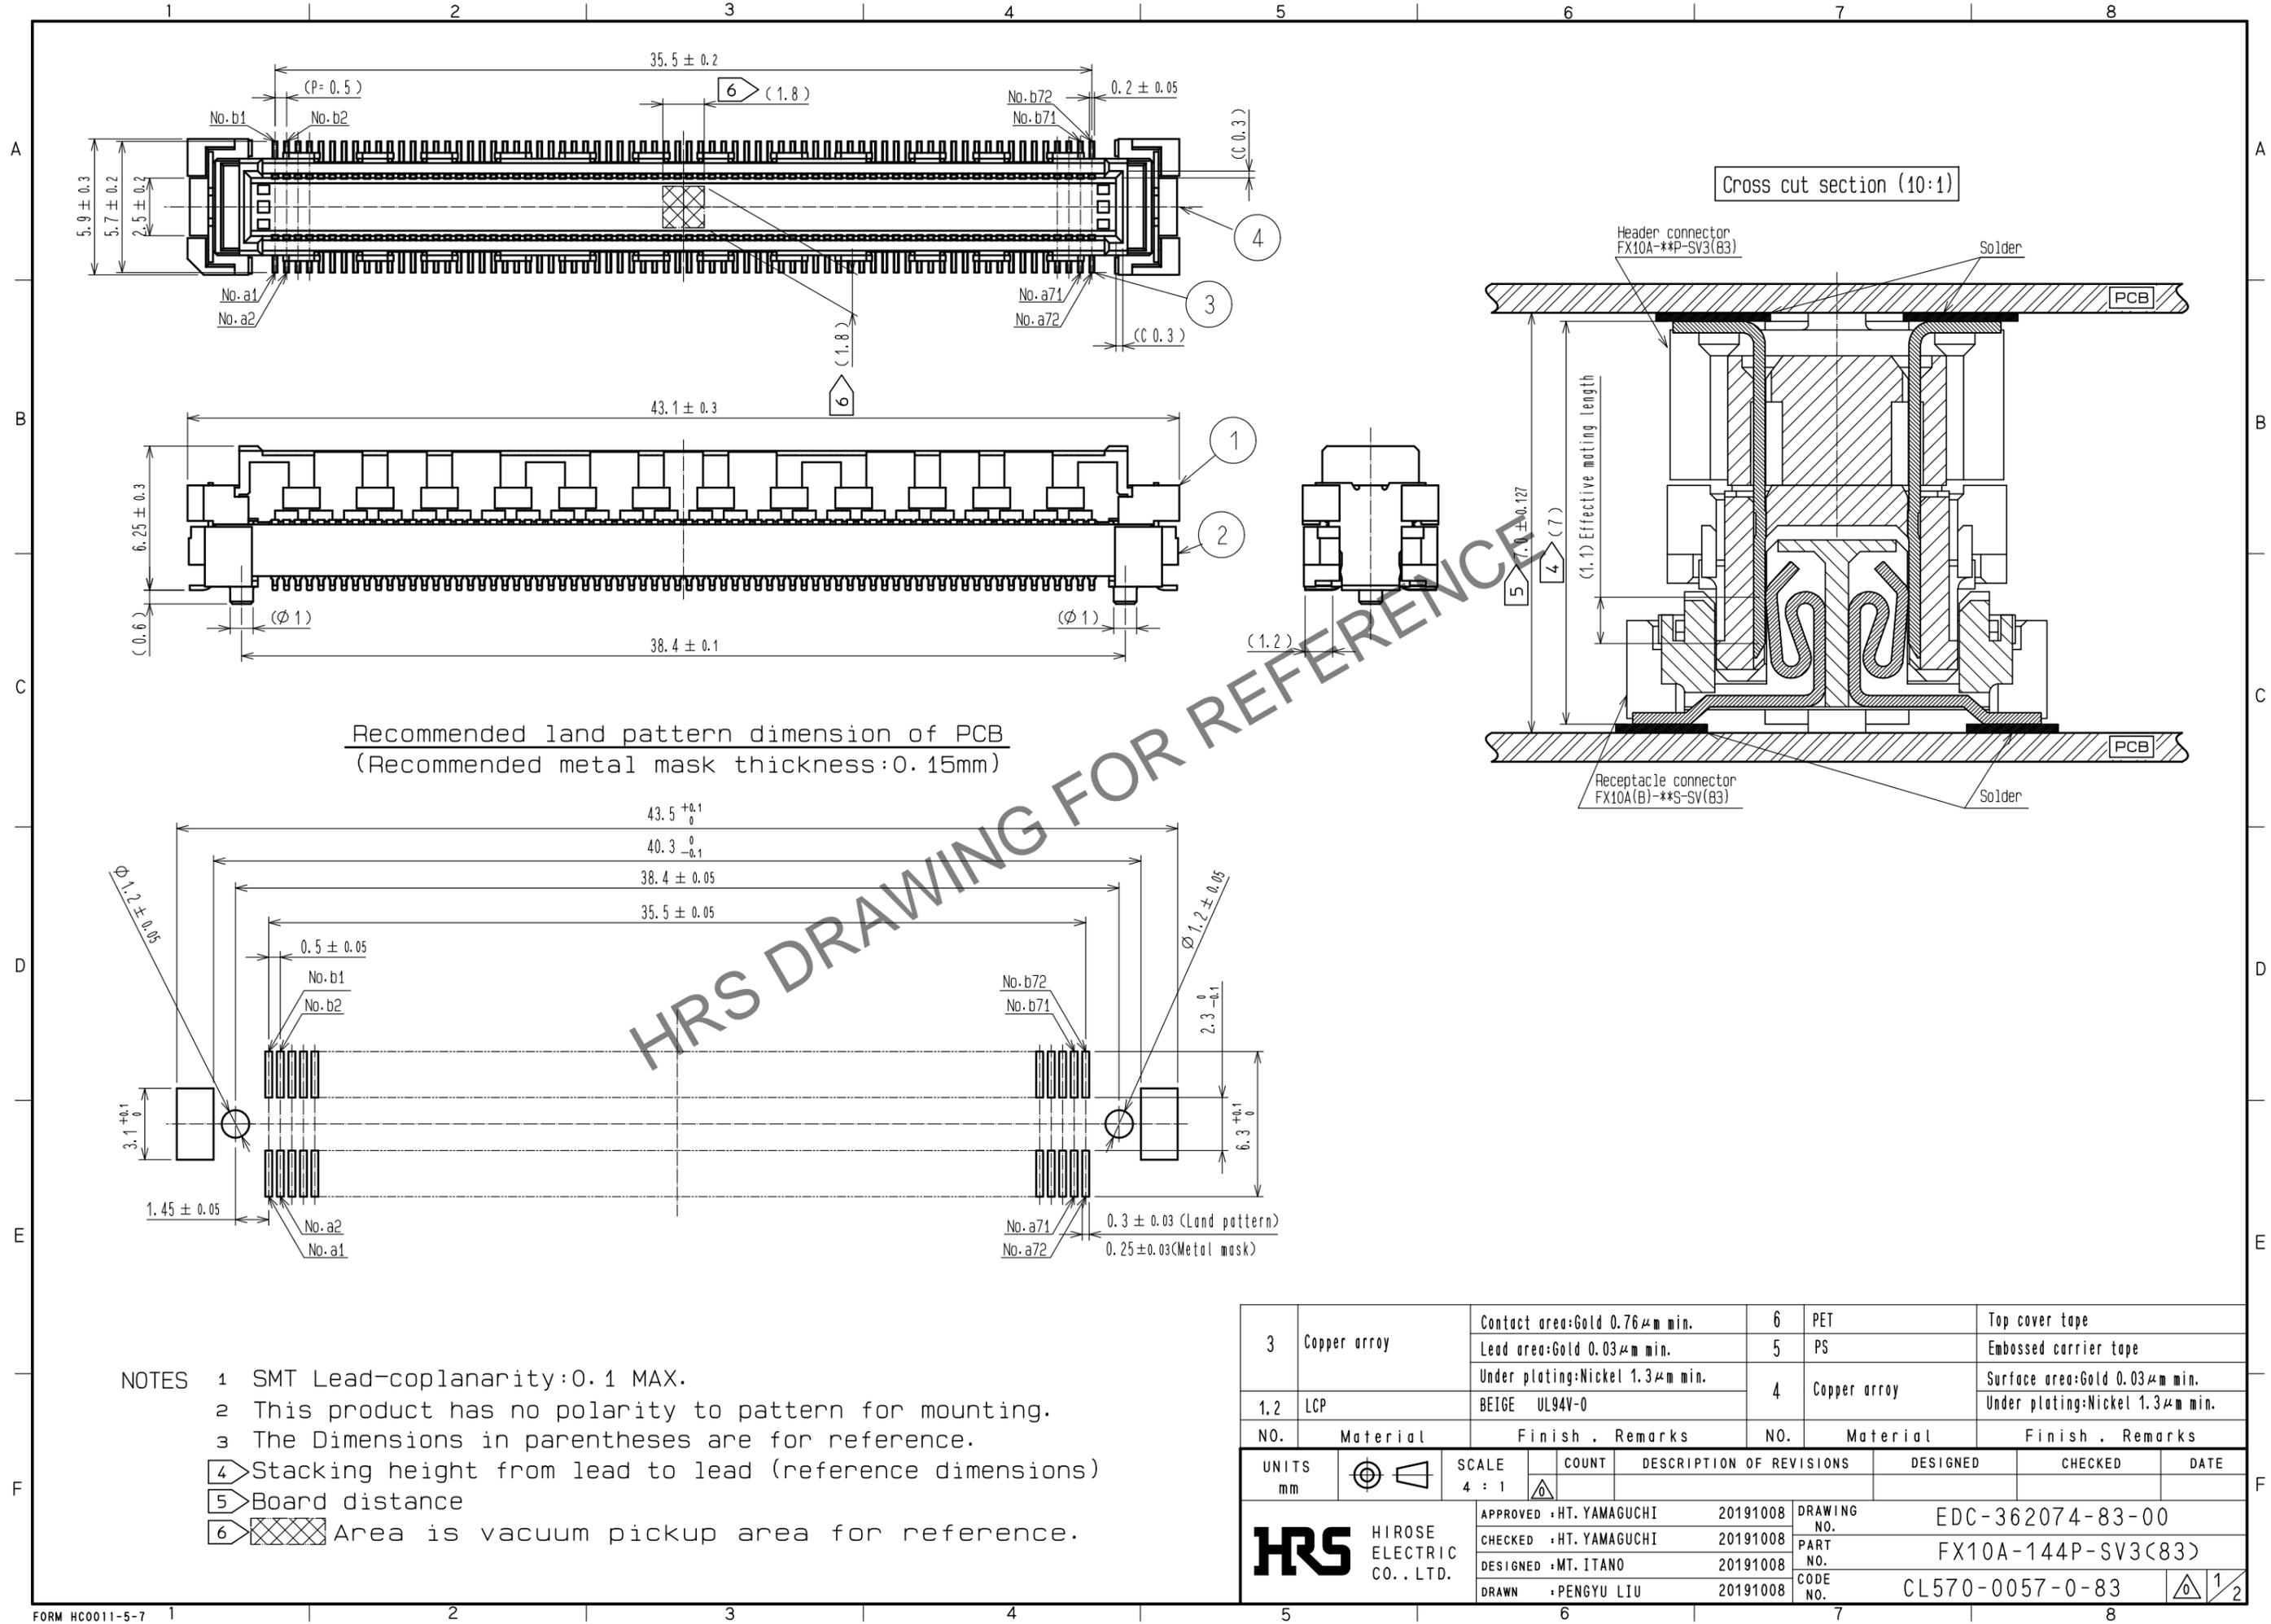

Recommended land pattern dimension of PCB
 (Recommended metal mask thickness:0.15mm)

- NOTES
- SMT Lead-coplanarity:0.1 MAX.
 - This product has no polarity to pattern for mounting.
 - The Dimensions in parentheses are for reference.
 - Stacking height from lead to lead (reference dimensions)
 - Board distance
 - Area is vacuum pickup area for reference.

3	Copper array	Contact area:Gold 0.76μm min. Lead area:Gold 0.03μm min. Under plating:Nickel 1.3μm min.	6	PET	Top cover tape
1,2	LCP	BEIGE UL94V-0	5	PS	Embossed carrier tape
			4	Copper array	Surface area:Gold 0.03μm min. Under plating:Nickel 1.3μm min.
NO.	Material	Finish . Remarks	NO.	Material	Finish . Remarks
UNITS mm		SCALE 4 : 1	COUNT		DESCRIPTION OF REVISIONS
			DESIGNED		CHECKED
			DATE		
APPROVED :HT. YAMAGUCHI		20191008	DRAWING NO.		EDC-362074-83-00
CHECKED :HT. YAMAGUCHI		20191008	PART NO.		FX10A-144P-SV3(83)
DESIGNED :MT. ITANO		20191008	CODE NO.		CL570-0057-0-83
DRAWN :PENGYU LIU		20191008			

