



Dec.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

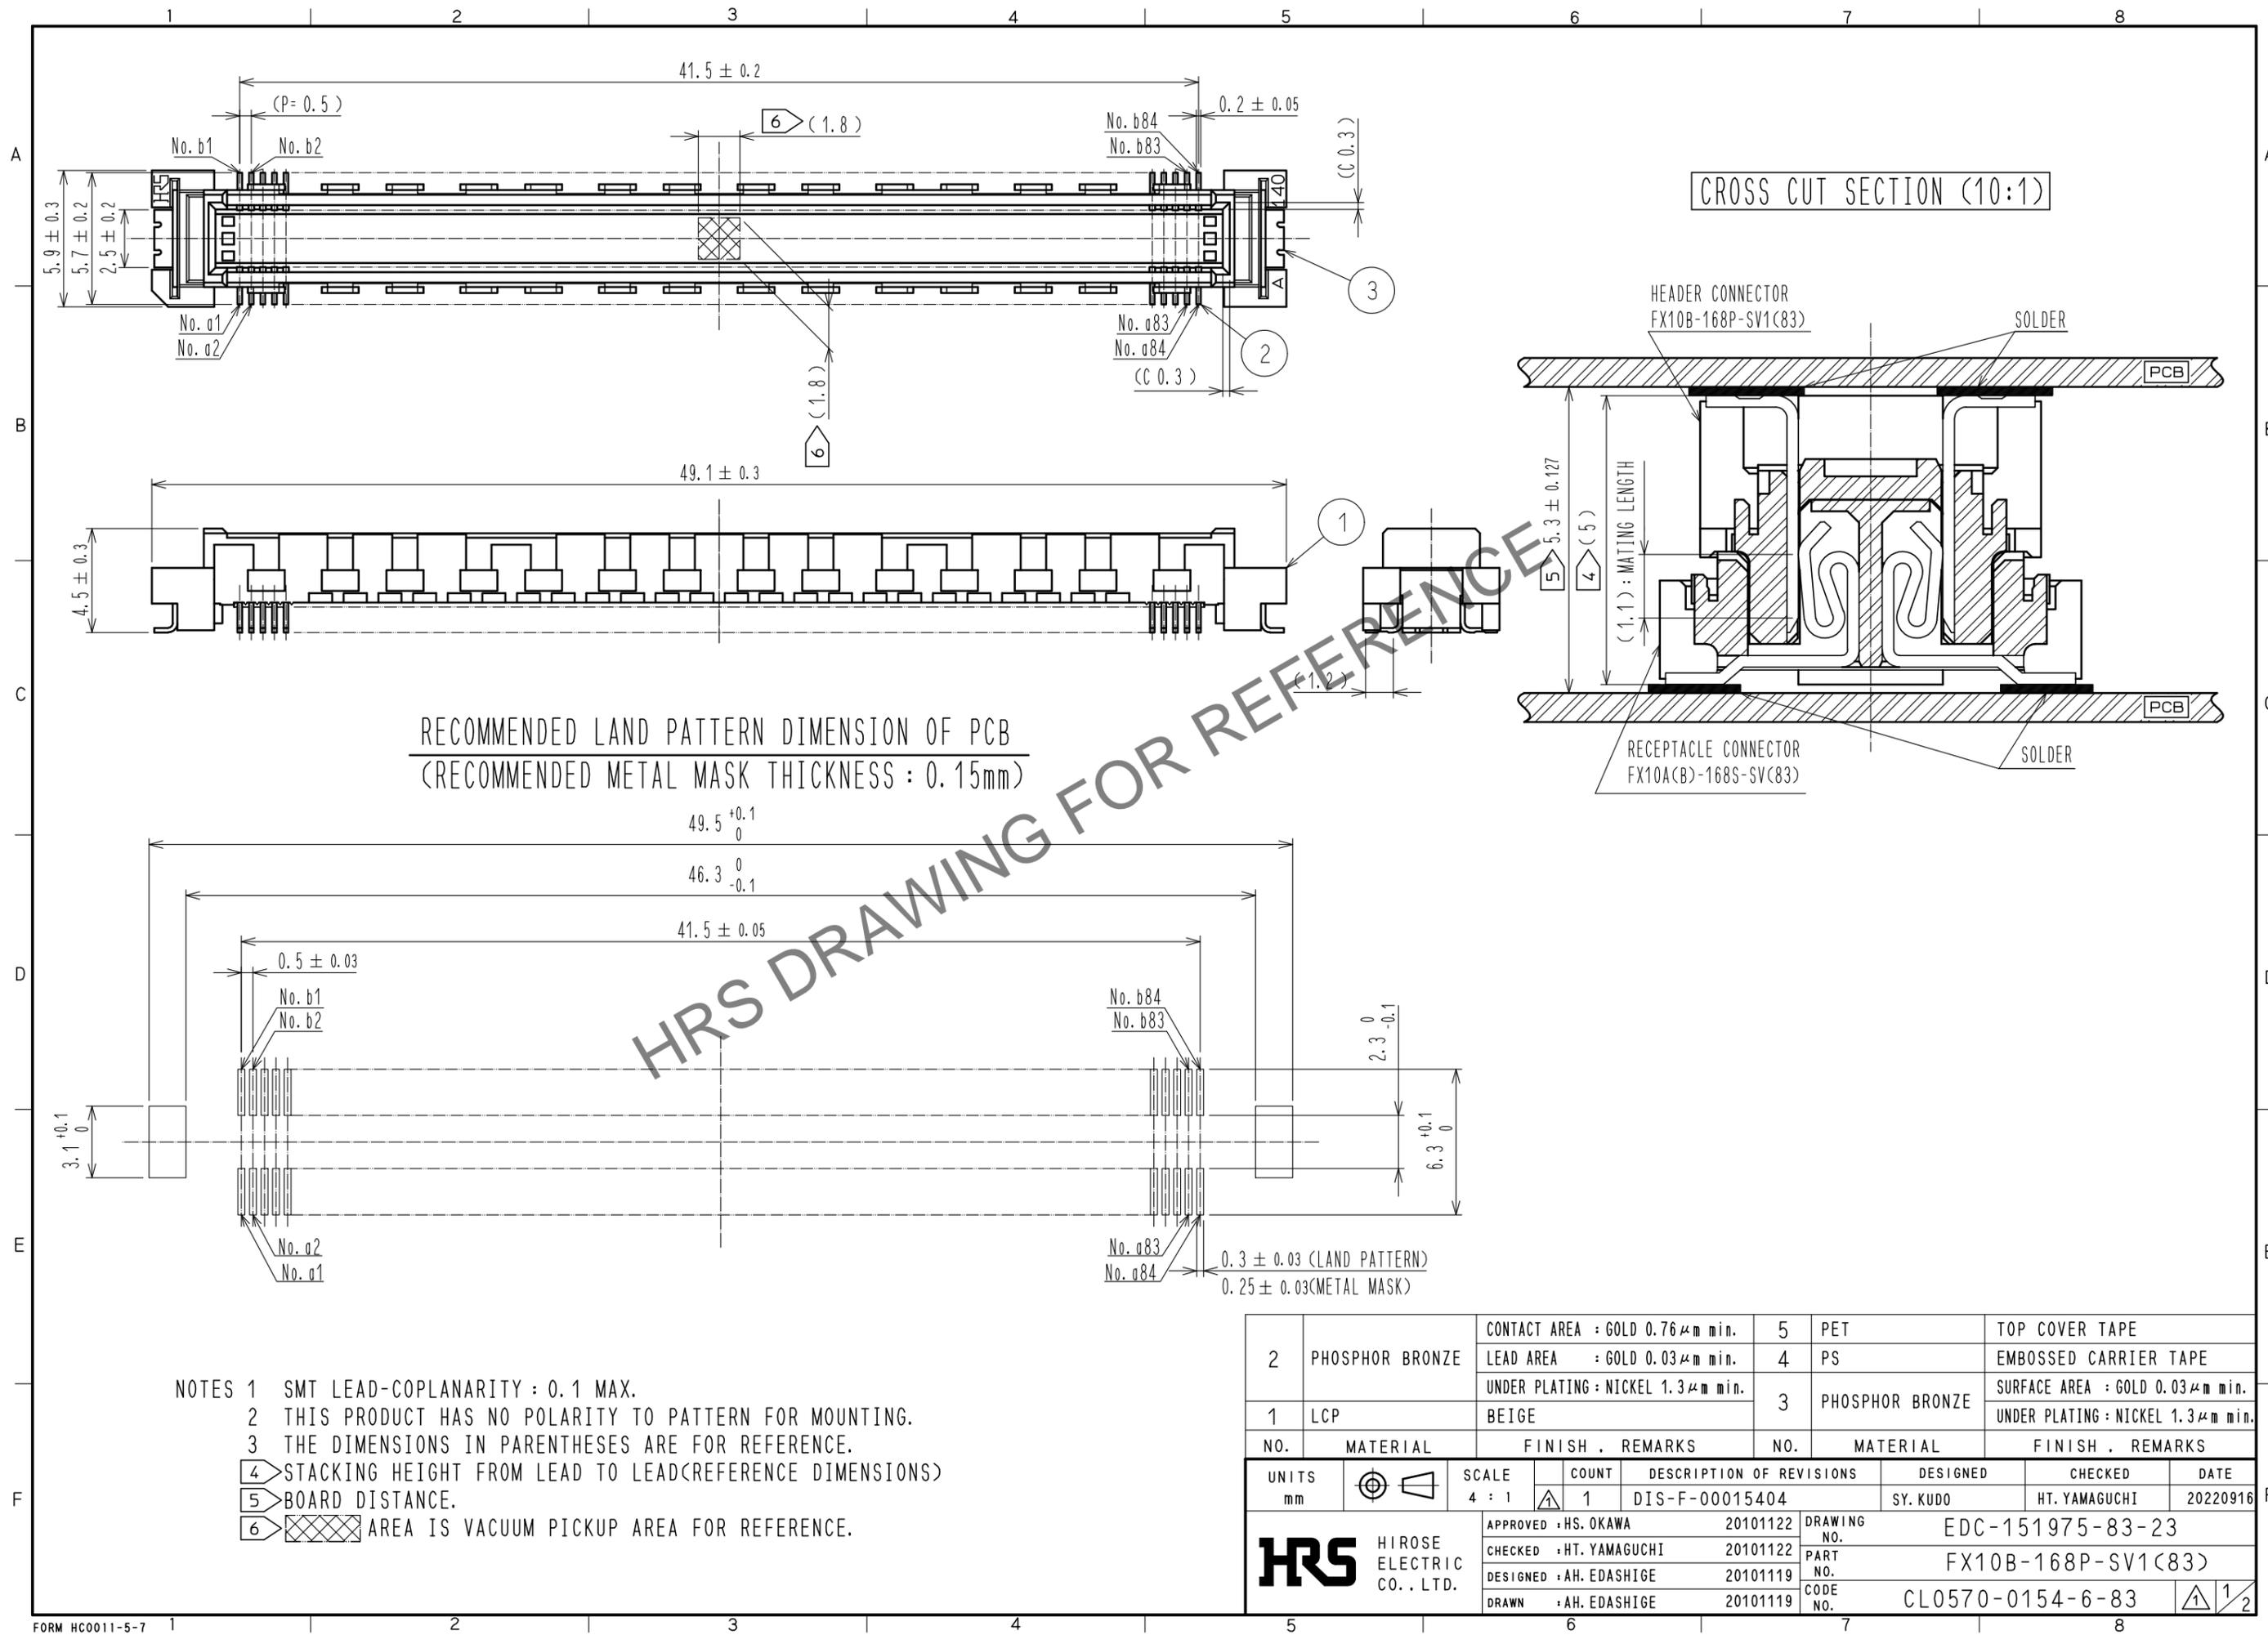

RECOMMENDED LAND PATTERN DIMENSION OF PCB
 (RECOMMENDED METAL MASK THICKNESS : 0.15mm)

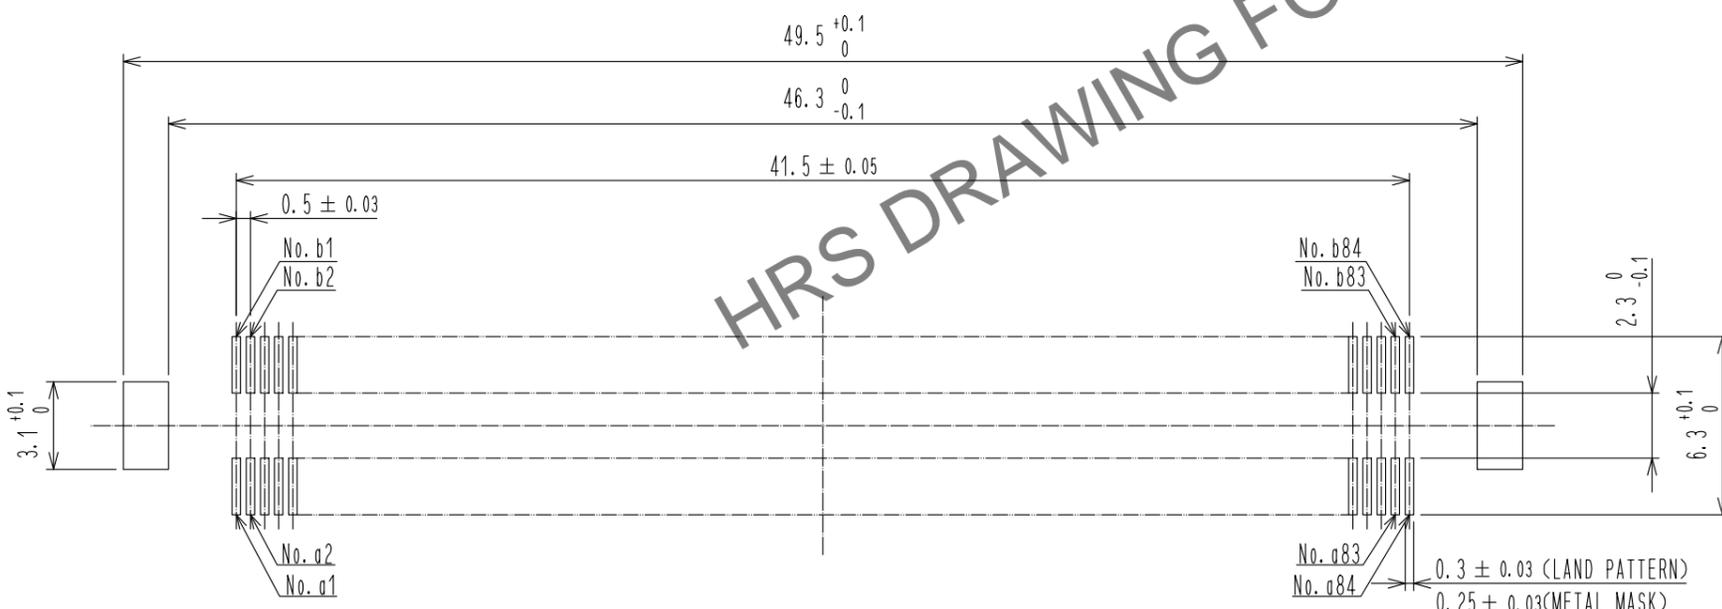


- NOTES
- 1 SMT LEAD-COPLANARITY : 0.1 MAX.
 - 2 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - 3 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
 - 4 STACKING HEIGHT FROM LEAD TO LEAD(REFERENCE DIMENSIONS)
 - 5 BOARD DISTANCE.
 - 6 AREA IS VACUUM PICKUP AREA FOR REFERENCE.

2	PHOSPHOR BRONZE	CONTACT AREA : GOLD 0.76 μm min.	5	PET	TOP COVER TAPE			
		LEAD AREA : GOLD 0.03 μm min.	4	PS	EMBOSSED CARRIER TAPE			
		UNDER PLATING : NICKEL 1.3 μm min.	3	PHOSPHOR BRONZE	SURFACE AREA : GOLD 0.03 μm min. UNDER PLATING : NICKEL 1.3 μm min.			
1	LCP	BEIGE						
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS			
UNITS		SCALE	COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
mm		4 : 1	1	DIS-F-00015404		SY. KUDO	HT. YAMAGUCHI	20220916
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA	20101122	DRAWING NO.		EDC-151975-83-23		
		CHECKED : HT. YAMAGUCHI	20101122	PART NO.		FX10B-168P-SV1(83)		
		DESIGNED : AH. EDASHIGE	20101119	CODE NO.		CL0570-0154-6-83		
		DRAWN : AH. EDASHIGE	20101119					


Dec.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

DRAWING FOR PACKING(2:1)

REELED DIMENSION (FREE)

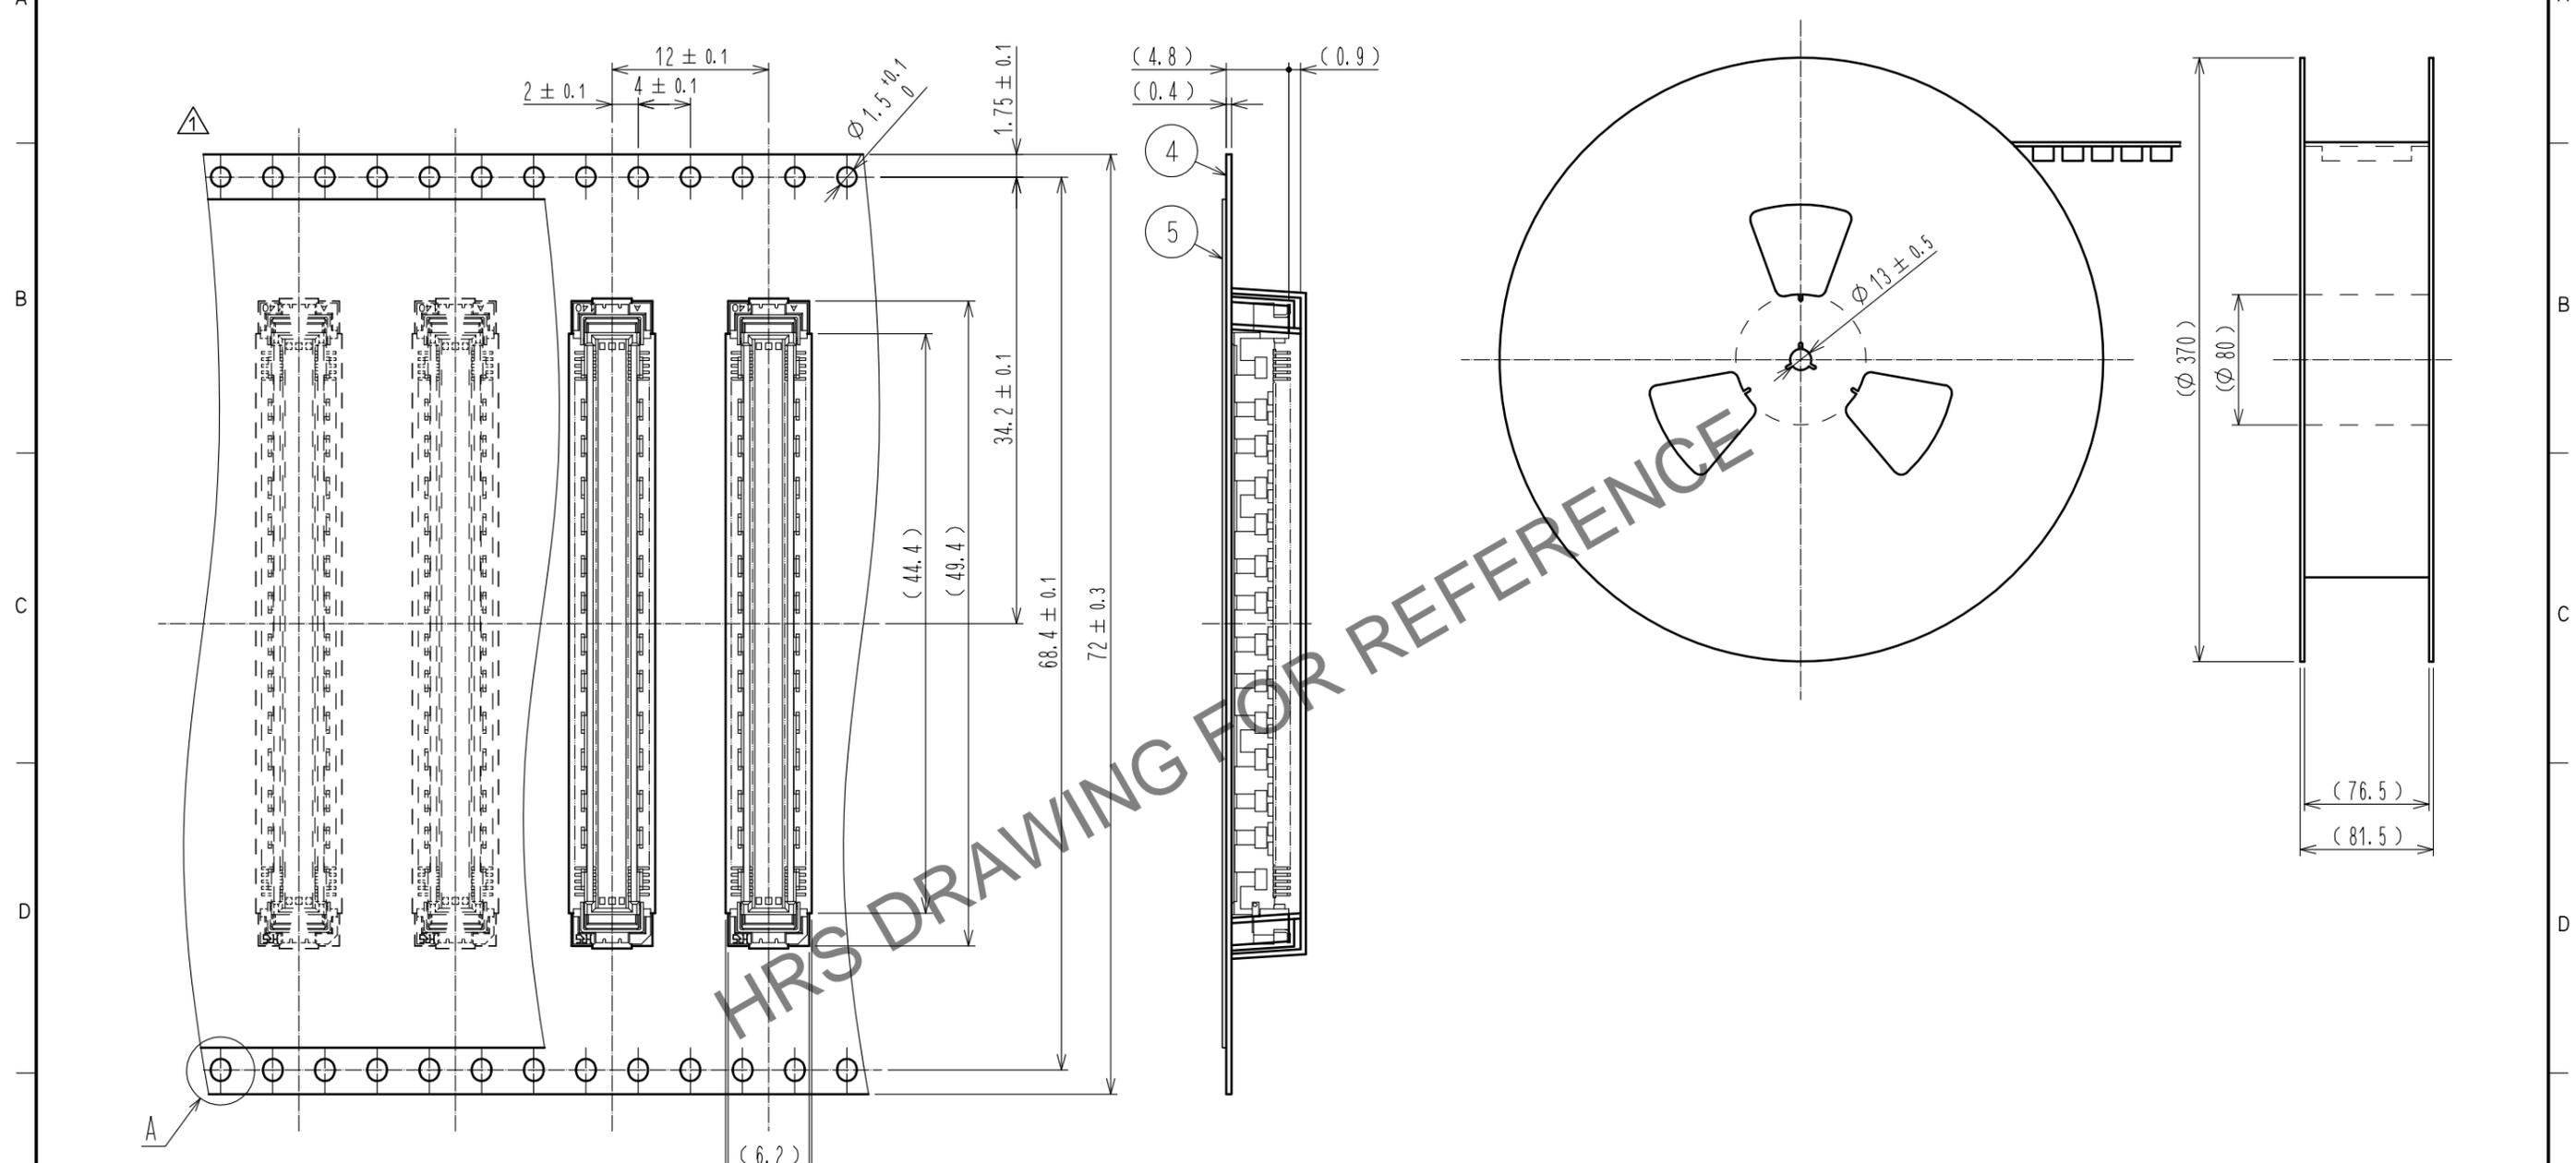

THE DIRECTION OF PULLING OUT



- NOTES
- 7 1 REEL : 1000 CONNECTORS.
 - 8 MINIMUM 10 COMPARTMENTS FROM BOTH REEL ENDS REMAIN EMPTY.
 - 9 THIS PRODUCT HAS NO POLARITY TO TAPE AND REEL PACKAGING.
 - 10 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

HRS	DRAWING NO.	EDC-151975-83-23	2/2
	PART NO.	FX10B-168P-SV1(83)	
	CODE NO.	CL0570-0154-6-83	