




COUNT DESCRIPTION OF REVISIONS		BY	CHKD	DATE	COUNT DESCRIPTION OF REVISIONS		BY	CHKD	DATE
△					△				
△					△				
△					△				

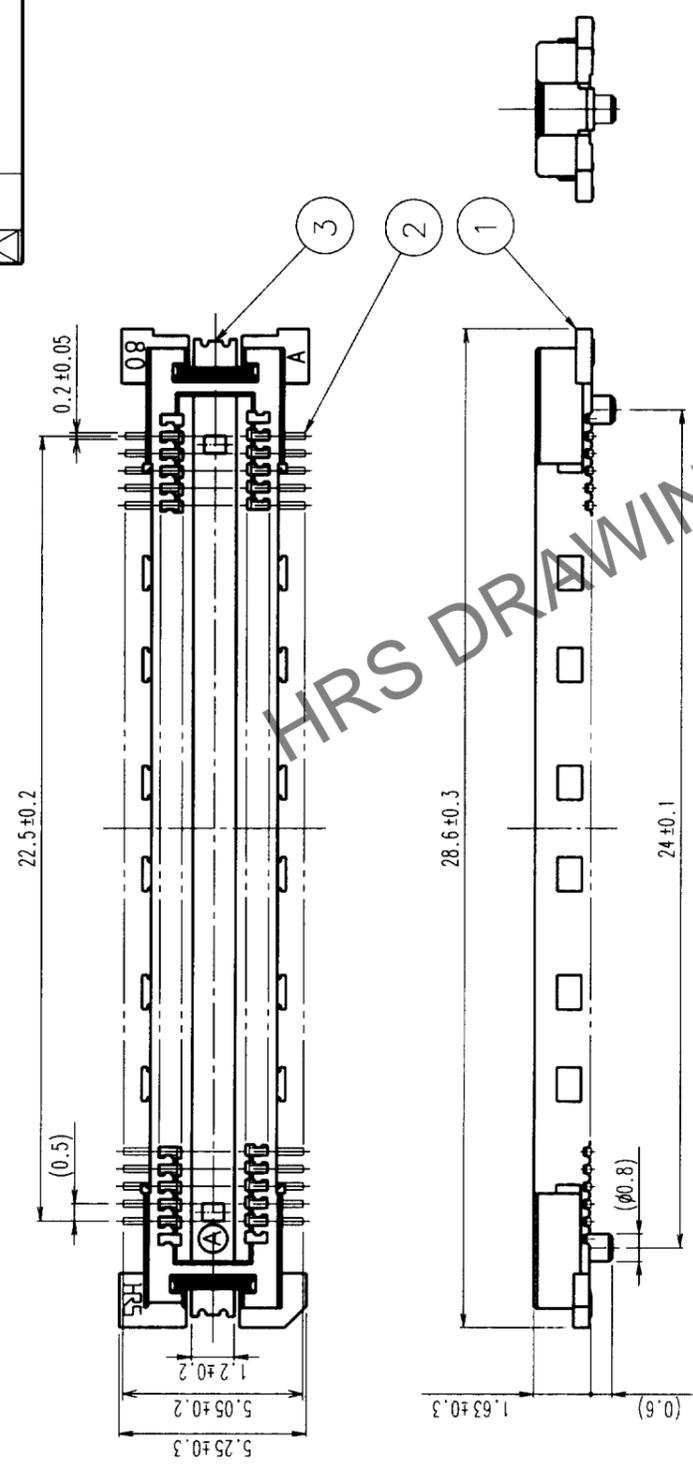

RECOMMENDED LAND PATTERN DIMENSION OF PCB

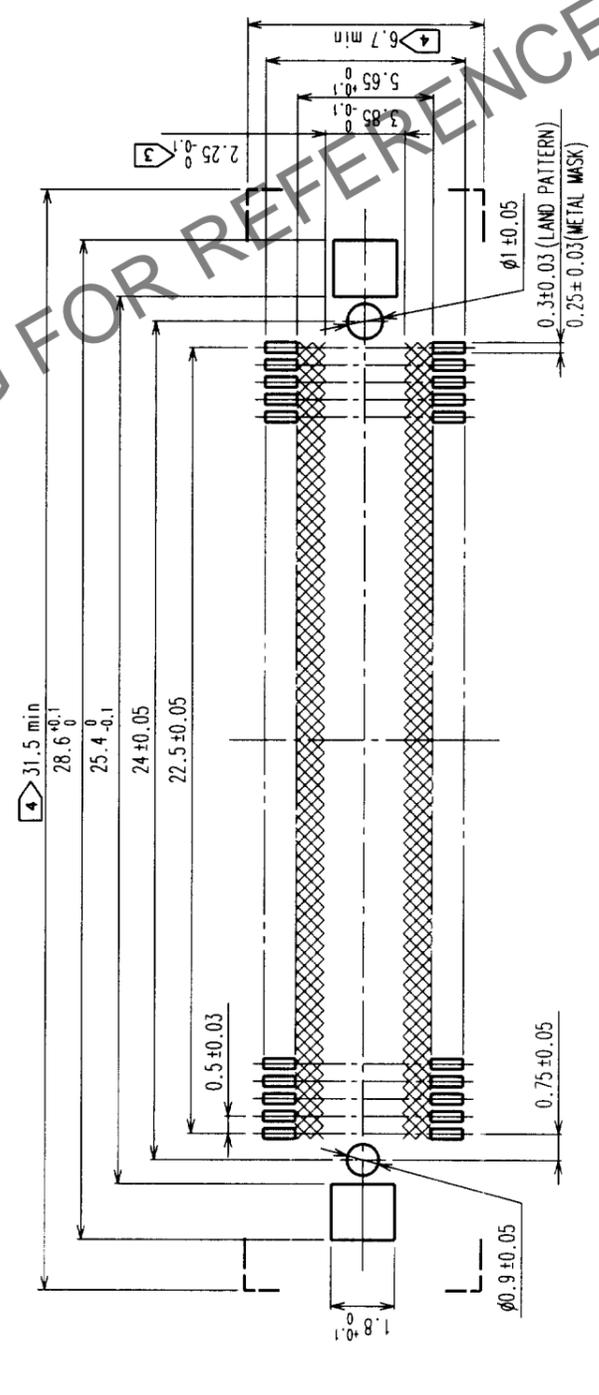

SIGNAL PORTION CROSS SECTION (10:1)

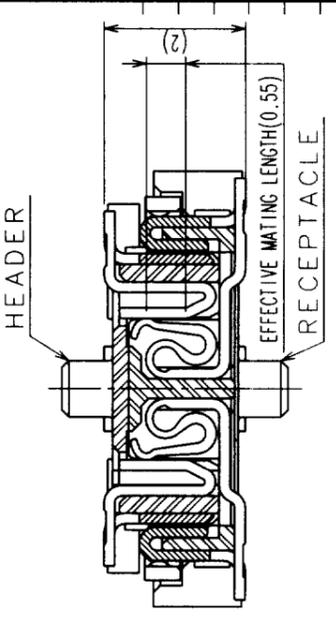

- NOTES
- 1 SMT LEAD-COPLANARITY: 0.1 MAX.
 - 2 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - 3 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - 4 DO NOT MOUNT OTHER DEVICES ONTO [] AREA, OR MATING PAIR CANNOT BE MATED.
 - 5 TO BE EMBOSSED CARRIER TAPED AS SPECIFIED IN SHEET 2.

2	COPPER ALLOY	CONTACT AREA: GOLD (0.1µm) OVER NICKEL
1	LCP	LEAD: GOLD FLASH OVER NICKEL
NO.	MATERIAL	FINISH, REMARKS
		BEIGE UL94V-0
CODE NO. (OLD)	CL	
DRAWN	DESIGNED	CHECKED
<i>M. Sakuma</i>	<i>M. Sakuma</i>	<i>M. Sakuma</i>
99.10.25	99.10.25	99.10.26
		99.10.26
DRAWING NO.	PART NO.	
EDC3-152101-01	FX11LA-92P-SV (21)	
SCALE	CODE NO.	
5 : 1	CL573-0043-4-21	
UNITS	mm	

TO	
PCK	

