


Jan.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

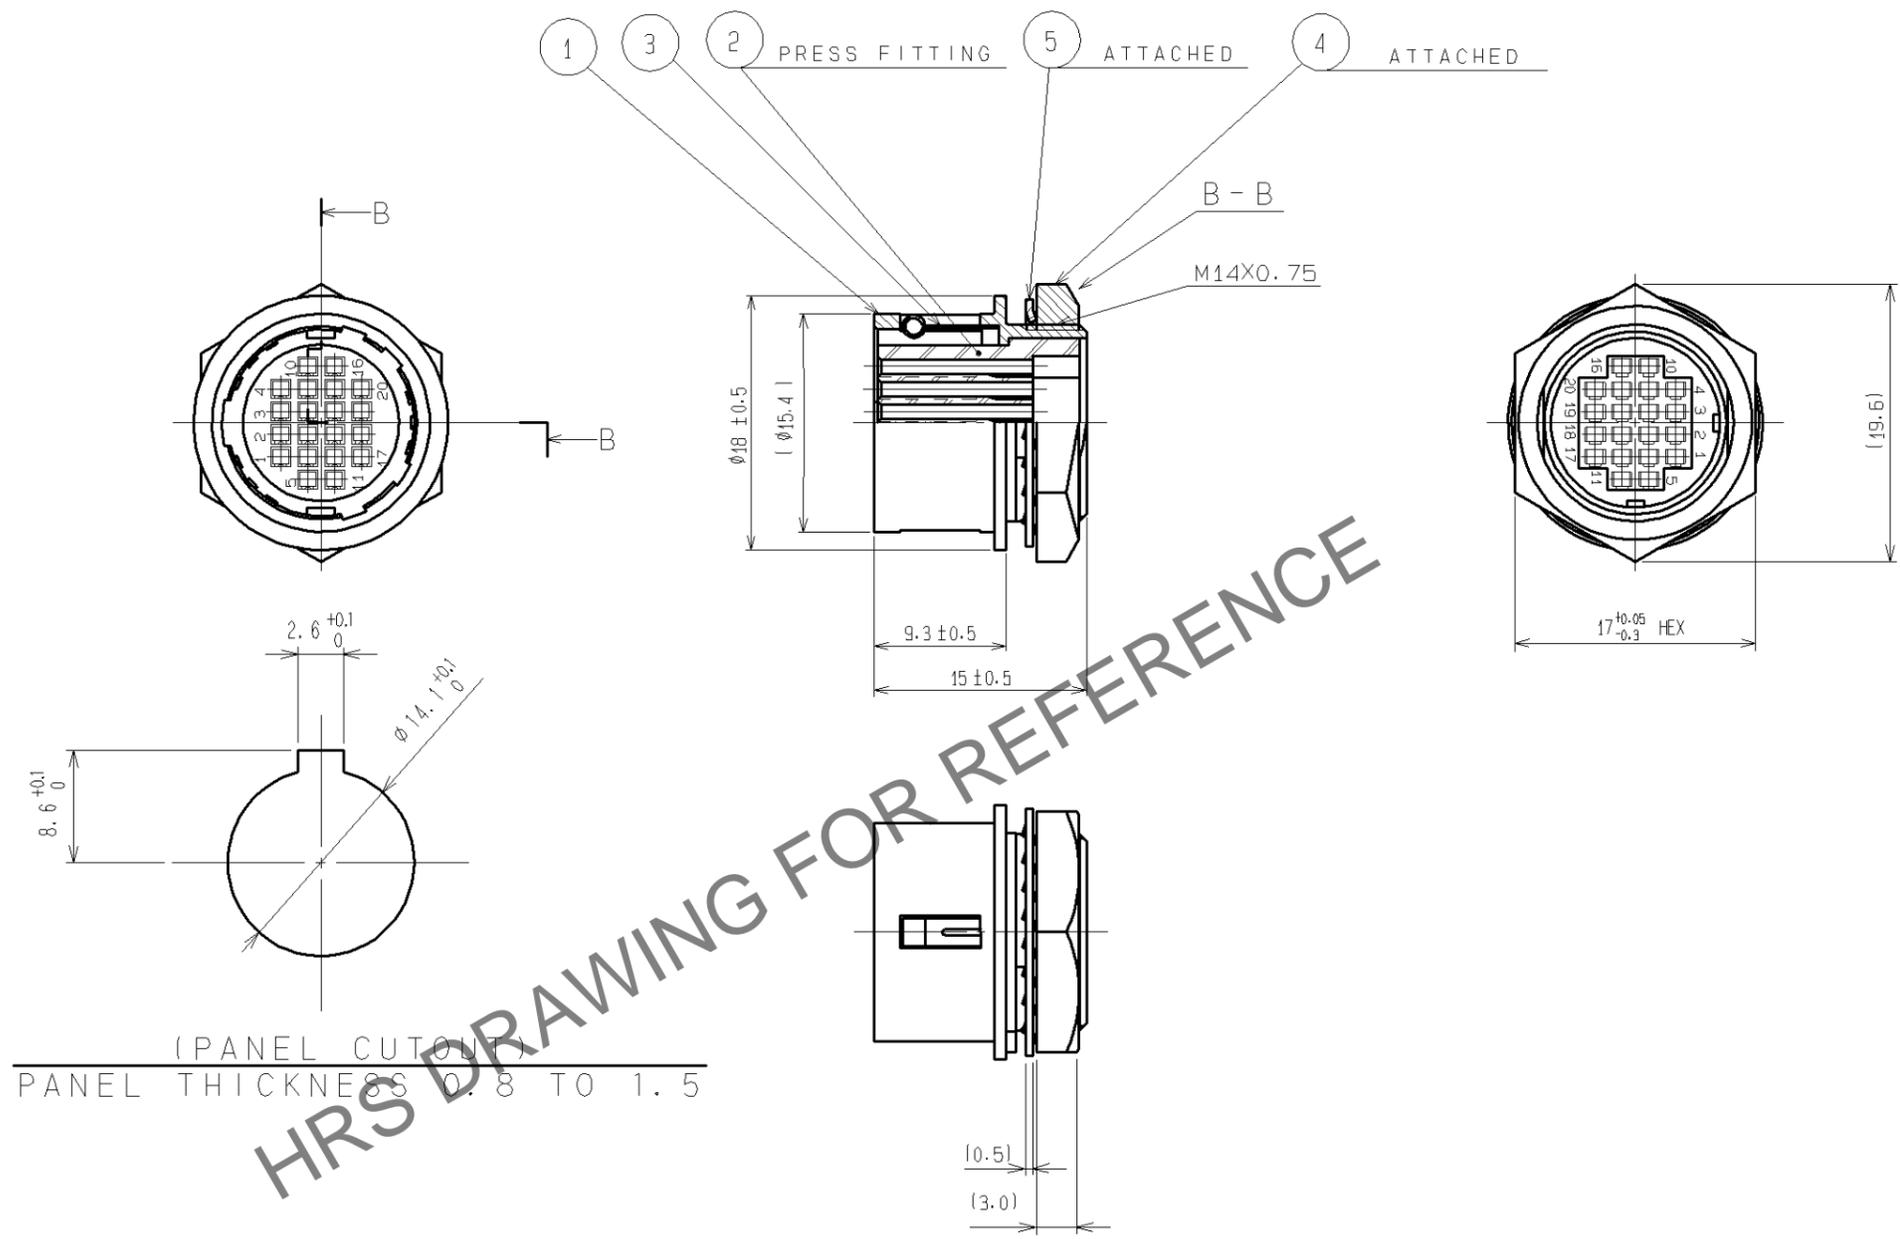

NOTES 1 APPLICABLE CRIMP CONTACT : HR12-SC-212 (CL112-0408-9)
 (APPLICABLE WIRE : AWG #26 TO #30 . INSULATION DIAMETER 1 MAX)
 2 APPLICABLE CONTACT EXTRACTION TOOL : HR12-SC-TP (CL150-0050-3)

3	STAINLESS STEEL							
2	PBT	(BLACK) UL94V-0	5	PHOSPHOR BRONZE NICKEL PLATED				
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	4	BRASS NICKEL PLATED				
NO.	MATERIAL	FINISH. REMARKS	NO.	MATERIAL FINISH. REMARKS				
UNITS mm			SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : MO.SATOH	06.08.31	DRAWING NO.	EDC3-042734-73			
		CHECKED : KY.EZAWA	06.08.31	PART NO.	HR10G-13R-20SC (73)			
		DESIGNED : YH.YAMADA	06.08.31	CODE NO.	CL110-1711-0-73			
		DRAWN : TY.SUZUKI	06.08.30					