


Feb. 1. 2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

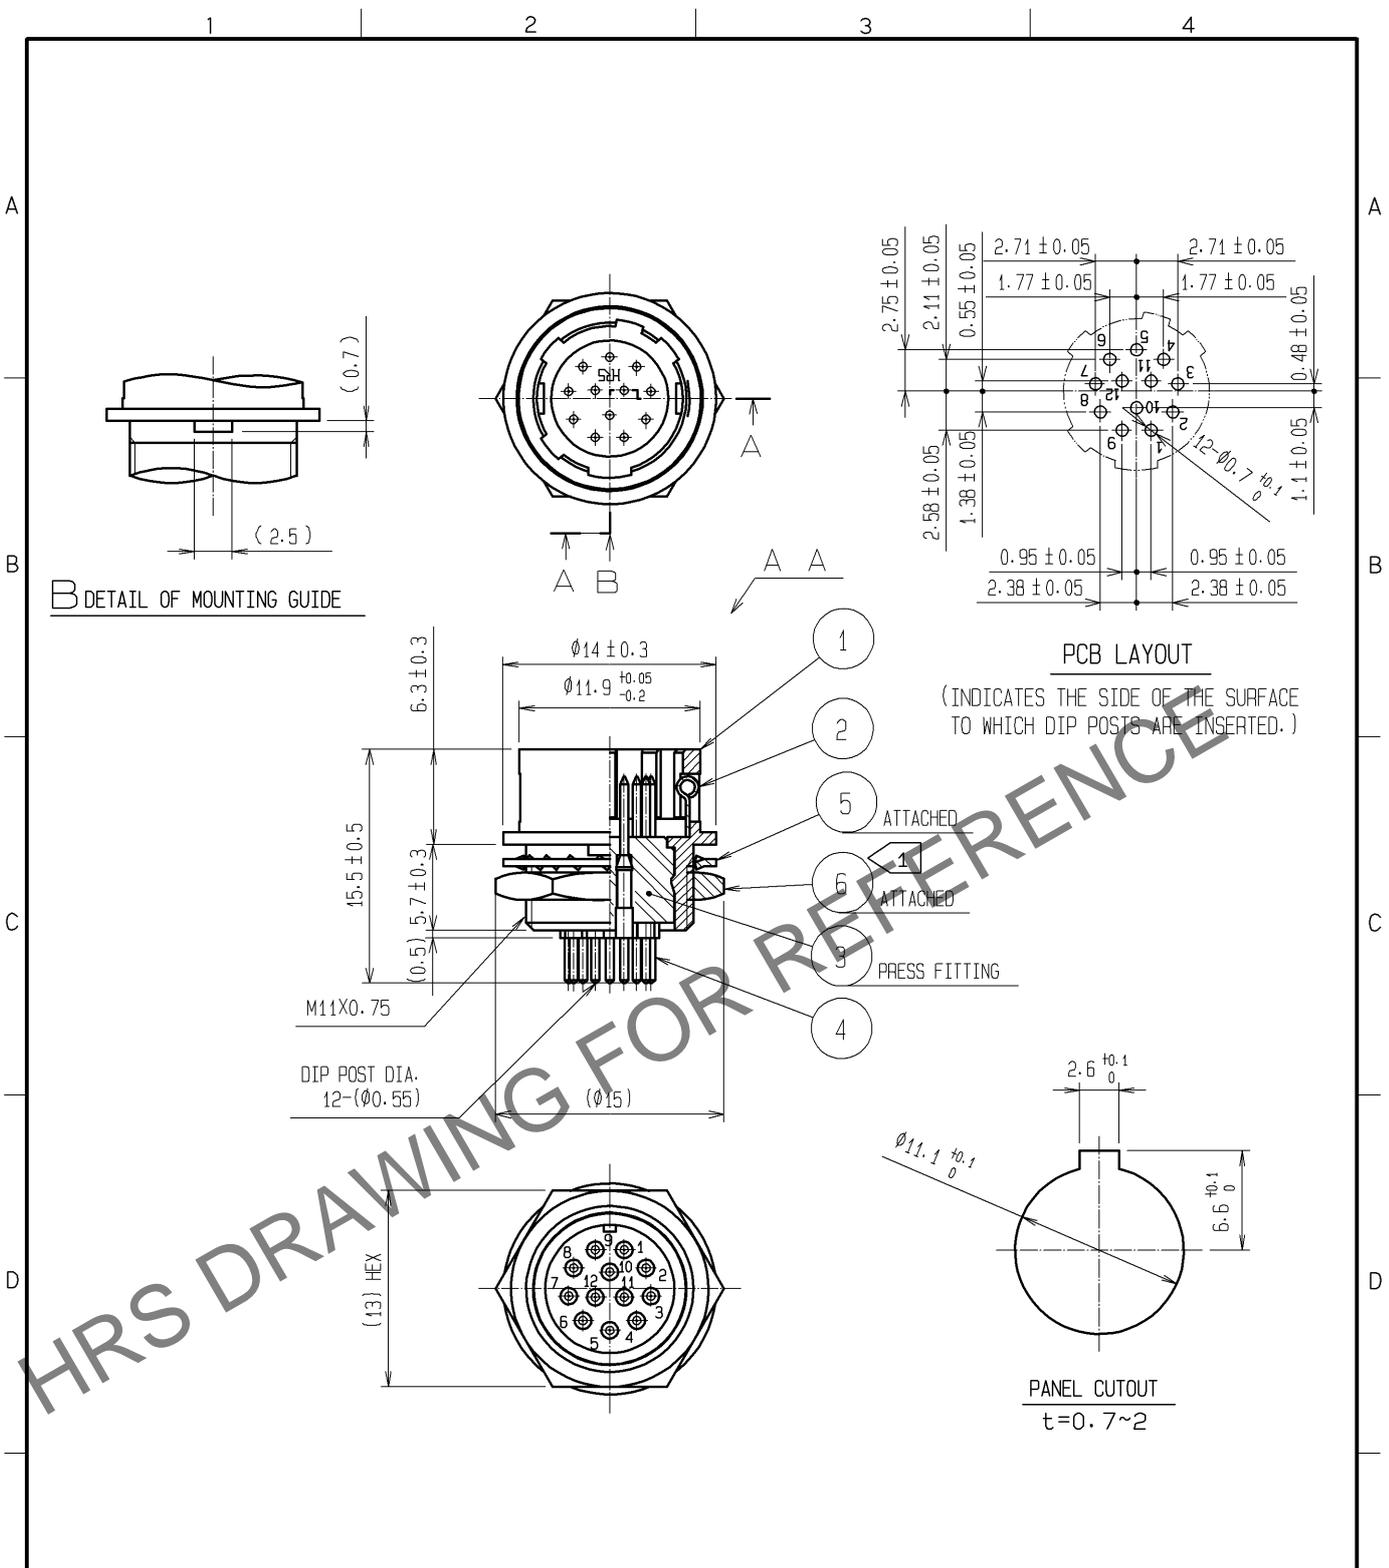

NOTE 1 THE RECOMMENDED CLAMP TORQUE OF REF. NO. ⑥ TO BE 2 N·m.
 LOCTITE 242, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO
 PREVENT REF. NO. ⑥ FROM LOOSENING.

3	POLYAMIDE	(BLACK) UL94V-0	6	BRASS Δ	NICKEL PLATING
2	STAINLESS STEEL		5	PHOSPHOR BRONZE	NICKEL PLATING
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	4	BRASS	GOLD PLATING 0.2 μ m min. NICKEL UNDER PLATING 2 μ m min.
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS mm		SCALE 2 : 1	COUNT Δ 1	DESCRIPTION OF REVISIONS DIS-C-001539	DESIGNED WR. AJIRO	CHECKED HY. KISHI	DATE 09.12.22
HIROSE ELECTRIC CO., LTD.				APPROVED : MO. SATOH 05.10.20	DRAWING NO. EDC4-009659-73		
				CHECKED : EJ. KUNII 05.10.20	PART NO. HR10-10R-12PA(73)		
				DESIGNED : DS. MATSUNE 05.10.19	CODE NO. CL110-0055-8-73		
				DRAWN : DS. MATSUNE 05.10.19	1/1		