


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

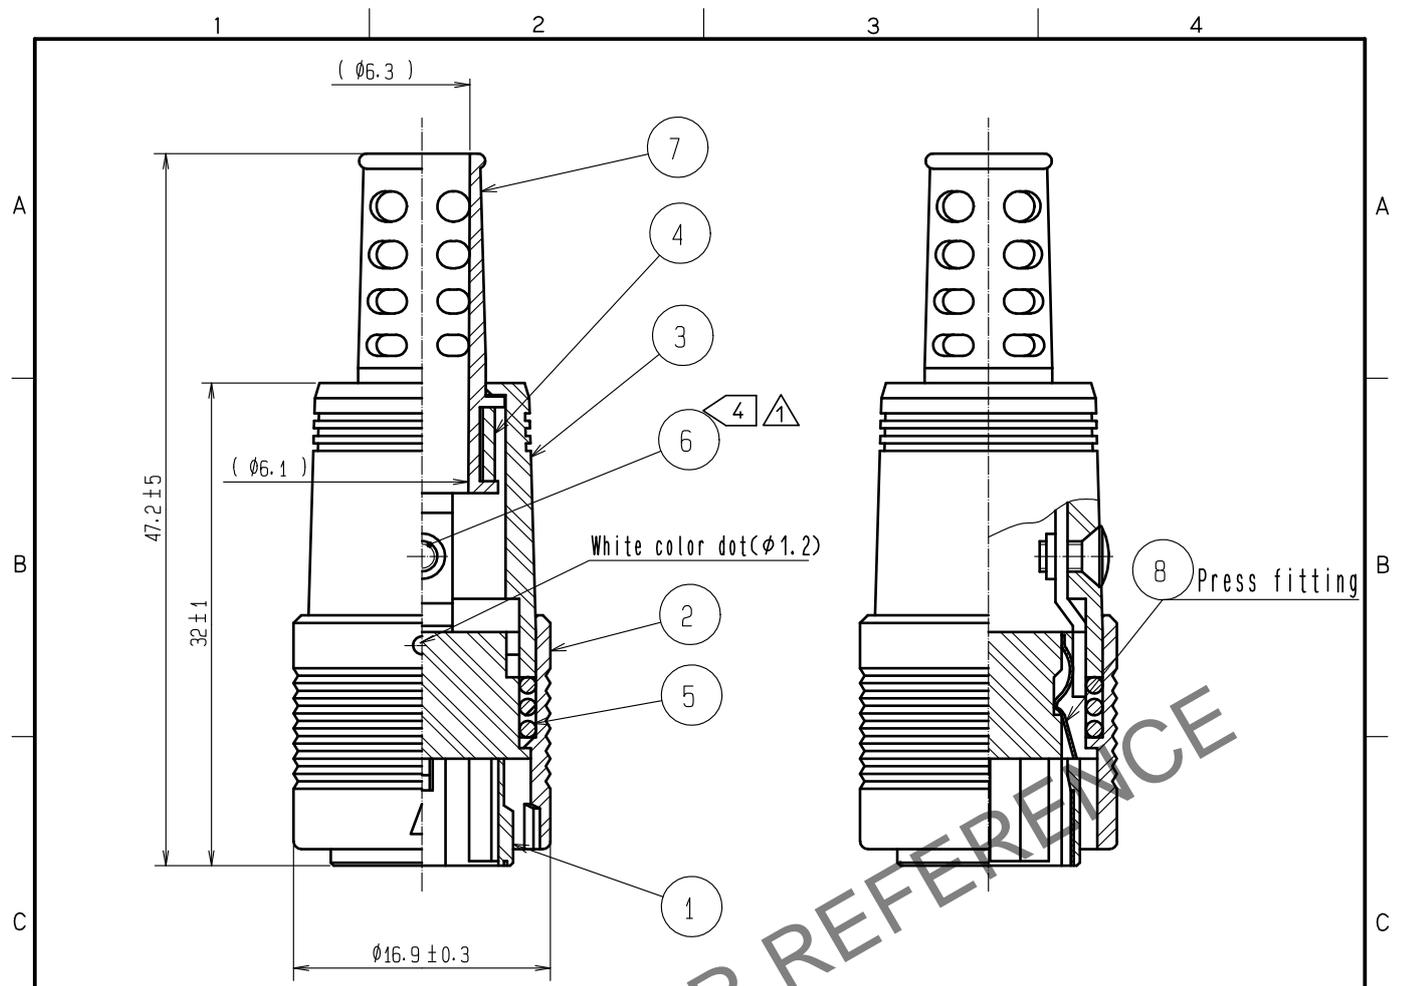

- Notes
- ① Applicable crimp contact:
 RP19-PC-222/CL113-0264-7
 (Applicable cable size : awg#24 to #28.
 Cable jacket outer diameter shall be $\phi 1.15\text{mm}$ or less.)
 - ② Applicable cable crimping tool :
 RP13A-TC-01/CL150-0070-0
 - ③ Extraction tool : RP6-SC-TP/CL150-0039-0
 - ④ The tightening torque of Ref No. ⑥ : 0.15 to 0.2 N·m.
 To prevent loosening Ref No. ⑥ , use LOCTITE 243,
 HENKEL JAPAN or equivalent.
 - ⑤ Shall be disassembled when delivered.
 - ⑥ The cable pull and twisting strength
 and other characteristics may differ,
 depending on the cable structure,
 please confirm before the use.

4	Brass		8	Stainless steel	
3	Polycarbonate	(BLACK) UL94V-0	7	Polyvinylchloride	(BLACK) UL94V-0
2	Polycarbonate	(BLACK) UL94V-0	6	Brass	Black chromete treatment (Trivalent chromium) JIS B 1111 M2X0.4X4
1	Polycarbonate	(BLACK) UL94V-0	5	Steel	NICKEL PLATING
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS mm	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
\varnothing ∇	2 : 1	③	DIS-C-00009777	TY. SUZUKI	HY. KOBAYASHI	20220209

HIROSE ELECTRIC CO., LTD.	APPROVED	•EJ. KUNII	20160323	DRAWING NO.	EDC-027897-71-00
	CHECKED	•EJ. KUNII	20160323	PART NO.	RP13A-12PA-13PC(71)
	DESIGNED	•MM. ISHII	20160323	CODE NO.	CL0113-4003-5-71
	DRAWN	•MM. ISHII	20160323		