



In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales winglow correspondents.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				
△				
△				

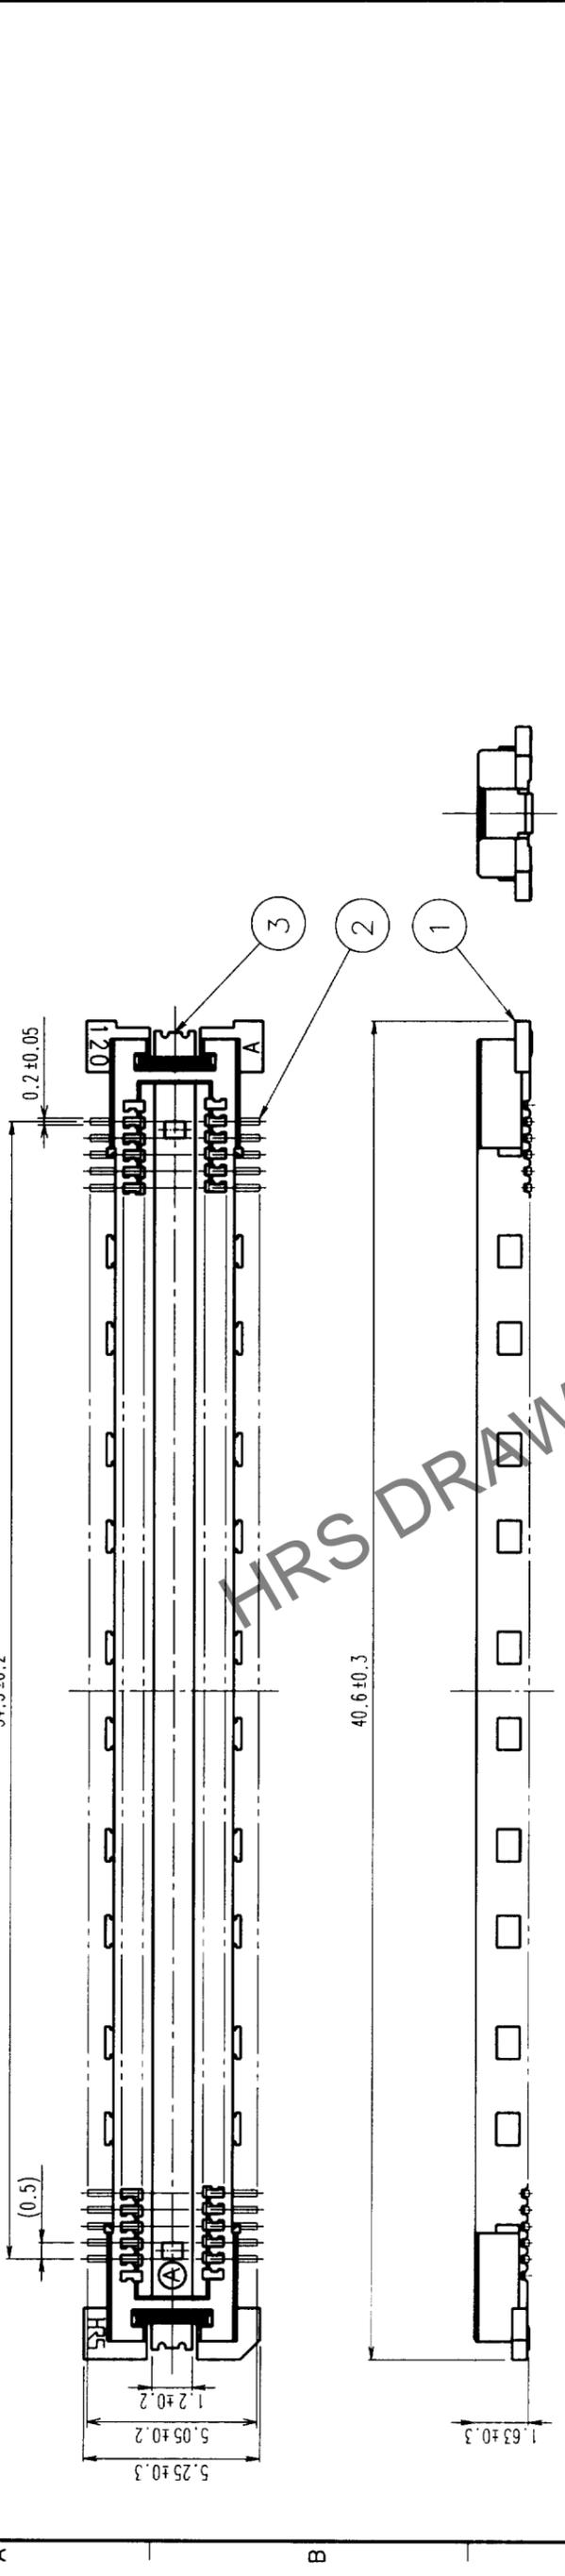

RECOMMENDED LAND PATTERN DIMENSION OF PCB

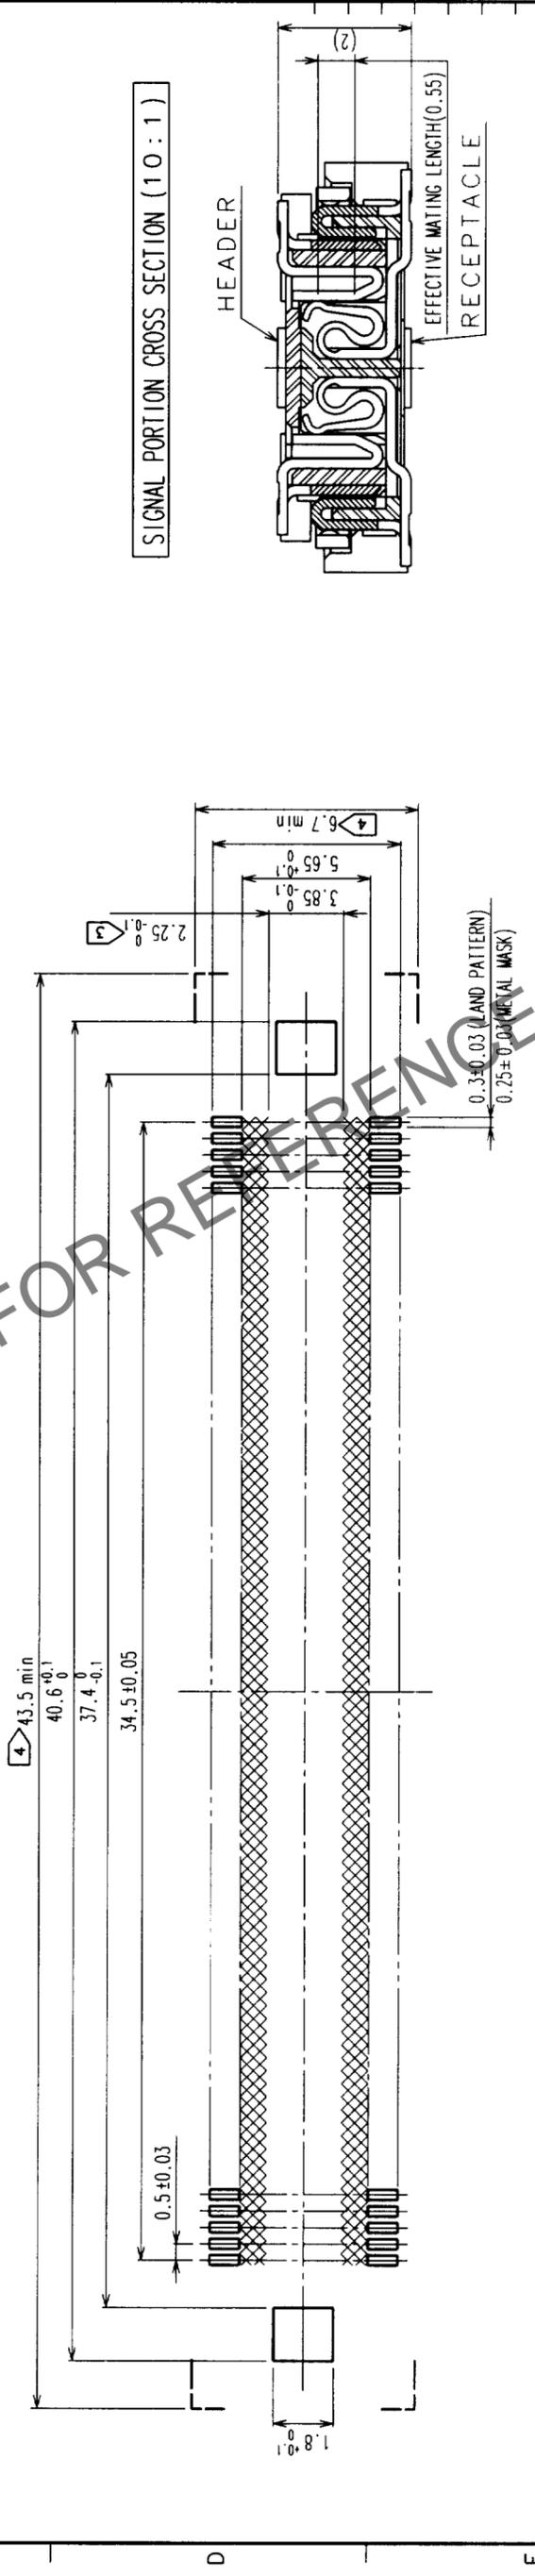

2	COPPER ALLOY	CONTACT AREA: GOLD (0.1μm) OVER NICKEL
1	LCP	LEAD: GOLD FLASH OVER NICKEL
NO.	MATERIAL	FINISH, REMARKS
		BEIGE UL94V-0
CODE NO. (OLD)	CL	
DRAWN	DESIGNED	CHECKED
<i>Mitsuharu</i>	<i>Mitsuharu</i>	<i>Mitsuharu</i>
99.10.25	99.10.25	99.10.26
		99.10.26
		99.10.26



DRAWING NO.	EDC3-152107-01
SCALE	5 : 1
UNITS	mm
PART NO.	FX11LB-140P-SV (21)
CODE NO.	CL573-0055-3-21

- NOTES
- SMT LEAD-COPLANARITY: 0.1 MAX.
  - THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
  - MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
  - DO NOT MOUNT OTHER DEVICES ONTO [ ] AREA, OR MATING PAIR CANNOT BE MATED.
  - TO BE EMBOSSED CARRIER TAPED AS SPECIFIED IN SHEET 2.


TO	
PCK	

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					△				
△					△				
△					△				

REELED DIMENSION (Free)

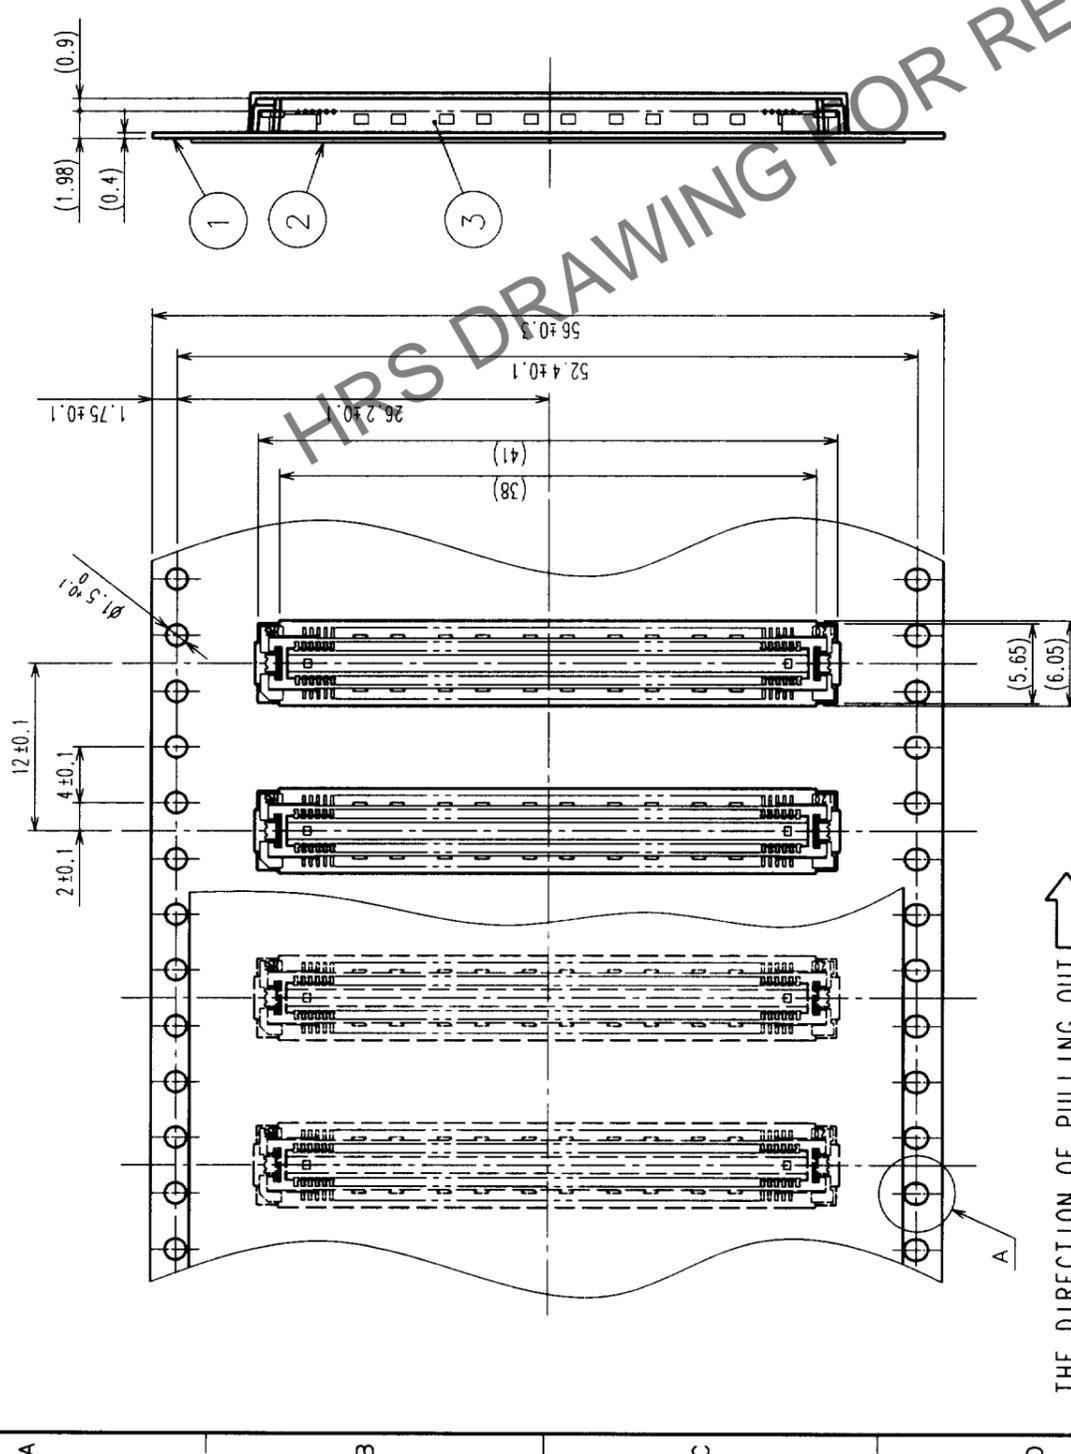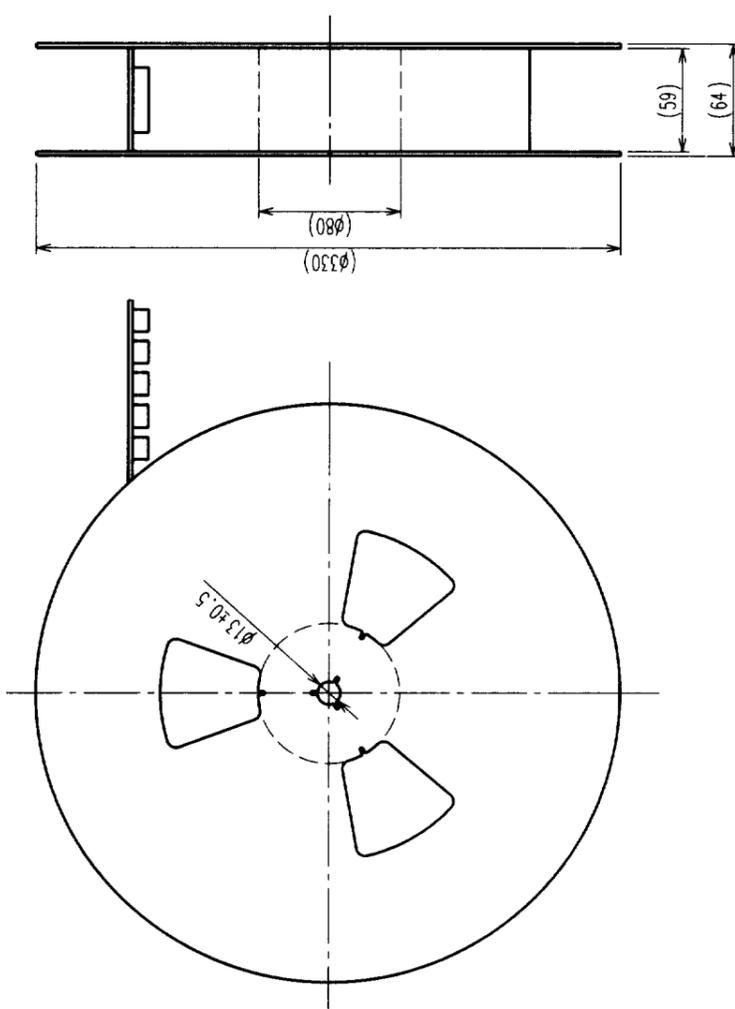

A (5:1)



- NOTES
- 1 REEL: 1000 CONNECTORS.
  - 2 MINIMUM 10 COMPARTMENTS FROM BOTH REEL ENDS REMAIN EMPTY.
  - 3 THIS PRODUCT HAS NO POLARITY TO TAPE AND REEL PACKAGING.

2	PET	TOP COVER TAPE	3	(CONNECTOR)	FINISH, REMARKS	DESIGNED	CHECKED	APPROVED	RELEASED
1	PS	EMBOSSED CARRIER TAPE	3						
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS	DESIGNED	CHECKED	APPROVED	RELEASED
CODE NO. (OLD)	DRAWING FOR PACKING		CL			DRAWN M. Saitoh 99.10.25		CHECKED M. Saitoh 99.10.26	
SCALE	DRAWING NO.		PART NO.						
2 : 1	EDC3-152107-01		FX11LB-140P-SV(21)						
UNITS	mm		CODE NO.						
	HIROSE ELECTRIC CO., LTD		CL573-0055-3-21						

TO	
PCK	

HPS DRAWING FOR REFERENCE